

A Comprehensive Review of Ultrasonic-Assisted Oil Recovery: Principles, Applications, and Future Prospects

Abstract

Ultrasonic waves have emerged as a transformative technology in enhanced oil recovery (EOR), offering solutions to critical challenges such as low recovery efficiency, reservoir heterogeneity, and high operational costs. This review explores the principles, mechanisms, and applications of ultrasonic waves in oil recovery, highlighting their ability to reduce interfacial tension, improve fluid mobility, and enhance reservoir permeability. Key findings from case studies indicate that ultrasonic-assisted EOR can increase recovery rates by up to 60%, reduce chemical dependency, and lower environmental impact compared to conventional methods.

The primary objective of this review is to synthesize existing research on ultrasonic wave applications in EOR, identify gaps in knowledge, and propose pathways for future advancements. Methodologies analyzed include laboratory-scale experiments, field applications, and modeling studies that evaluate the effects of ultrasonic parameters such as frequency, amplitude, and power density on recovery performance.

By providing a comprehensive understanding of ultrasonic-assisted oil recovery, this study underscores its potential to revolutionize hydrocarbon production, especially in challenging reservoirs. Future research directions include optimizing ultrasonic parameters for specific reservoir conditions and integrating this technology with hybrid recovery methods for enhanced efficiency and scalability.

Keywords: Ultrasonic Waves, Enhanced oil recovery (EOR), Cavitation effects, Acoustic streaming, Permeability enhancement, Sustainable EOR.

1. introduction

Oil recovery remains a cornerstone of global energy production, yet traditional recovery methods face escalating challenges, including declining production rates, environmental concerns, and the economic burden of advanced extraction techniques. These limitations necessitate the exploration of innovative and sustainable recovery methods. Among these, ultrasonic waves have emerged as a promising technology capable of revolutionizing oil recovery processes by leveraging their unique physical properties [1].

This study aims to provide a comprehensive overview of the application of ultrasonic waves in oil recovery, with the following objectives [2]:

1. To elucidate the unique mechanisms of ultrasonic wave propagation and their interaction with reservoir media.
2. To compare the efficiency and environmental impact of ultrasonic-assisted recovery methods with traditional techniques.
3. To analyze case studies and experimental results to evaluate the practical benefits of ultrasonic technology across various reservoir types.
4. To identify the current limitations and propose future research directions for scaling up ultrasonic applications in oil fields.

Ultrasonic waves are sound waves with frequencies above the human hearing range (>20 kHz). Unlike conventional recovery methods, ultrasonic waves exploit phenomena such as cavitation, acoustic streaming, and microstreaming to disrupt interfacial tensions, alter reservoir wettability, and mobilize trapped oil. Key advantages of ultrasonic technology include [3]:

1. Environmentally Friendly Operation: Ultrasonic waves minimize the need for chemical agents, reducing ecological risks and waste.
2. Cost-Effectiveness: They offer reduced operational costs due to lower energy consumption and the ability to target specific reservoir zones.
3. Versatility: Their application spans primary, secondary, and tertiary recovery stages, making them suitable for diverse reservoir conditions.
4. Enhanced Efficiency: Ultrasonic waves improve fluid mobility and recovery rates by accessing previously untapped reserves.

Despite extensive research on EOR methods, there remains a significant gap in understanding the large-scale application of ultrasonic waves in oil fields. Existing studies primarily focus on laboratory-scale experiments, leaving questions about scalability, economic feasibility, and long-term environmental impacts unanswered. Moreover, limited attention has been given to integrating ultrasonic technology with conventional methods to maximize recovery rates and optimize resource utilization [4].

This study bridges these gaps by providing an in-depth review of ultrasonic technology's principles, mechanisms, and applications in oil recovery. It also highlights case studies that demonstrate its efficacy in diverse geological formations and proposes strategies for overcoming the technical challenges associated with scaling up. By doing so, the study contributes to advancing sustainable and efficient oil recovery technologies, aligning with global energy and environmental goals [1-4].

1.1. Ultrasonic Stimulation: A Novel Approach for Enhanced Oil Recovery

Ultrasonic stimulation is an innovative technology gaining prominence as a method for enhancing oil recovery. Unlike traditional approaches such as acidizing or hydraulic fracturing, ultrasonic stimulation employs high-frequency sound waves to improve reservoir conditions and mobilize trapped hydrocarbons [5].

- **Principles of Ultrasonic Stimulation**

Ultrasonic waves generate mechanical vibrations that propagate through reservoir formations, inducing phenomena such as cavitation, acoustic streaming, and microstreaming. These effects help dislodge fine particles, reduce interfacial tension, and alter reservoir wettability, leading to enhanced fluid mobility [6,7].

- **Advantages of Ultrasonic Stimulation**

1. Environmental Safety: Ultrasonic stimulation reduces the reliance on chemicals, minimizing environmental risks associated with conventional methods like acidizing.
2. Non-Invasive Mechanism: It operates without fracturing the reservoir, preserving its structural integrity and reducing risks of damage.
3. Targeted Action: Ultrasonic waves can be focused on specific reservoir zones, optimizing energy use and recovery efficiency.
4. Cost-Effectiveness: This method reduces operational costs by limiting the need for extensive infrastructure and complex chemical treatments [8-10].

- **Applications in Enhanced Oil Recovery**

Ultrasonic stimulation has demonstrated success in both laboratory and field applications. In particular, it has proven effective in reservoirs with high porosity and those exhibiting moderate declines in production rates. Case studies highlight its ability to increase oil recovery factors while maintaining environmental compliance, making it a promising technology for sustainable reservoir management [11].

The Table 1 lists the key advantages of ultrasonic stimulation, such as environmental friendliness, selectivity, and cost-effectiveness.

Table 1) Advantages of ultrasonic stimulation [1-10].

Advantages	Explanation
No need for reactants	This method does not require expensive chemicals such as acids, solvents, surfactants.
Selectivity	The ability to select the effect on various phases of a multiphase medium and the ability to select in the extraction of useful elements are among the advantages of this method.
Production capability	The advantages of this method include fewer machines and operations and an opportunity for automation.
Accuracy	The ability to motivate at the molecular level demonstrates the high precision of this method.
Combination capability	The possibility of simultaneous action on different phases and combination with conventional methods has minimized the limitations of this method.
Environment	The ability to convert after exposure to environmentally friendly and low-hazard environments, as well as ease of production, has made this method environmentally friendly.
Mud cake	This method is widely used in horizontal wells with long horizontal intervals due to the removal of mud cake.
Biodegradable	Due to not using chemicals, it is environmentally friendly and fully compatible with the environment.
Shelf life	The effect of ultrasonic stimulation lasts between 3 to 24 months and its effect on increasing production rate is between 2 to 3 times.

1.2. Ultrasonic Waves: Definition, Characteristics, and Advantages

• Definition and Fundamentals

Ultrasonic waves are sound waves with frequencies exceeding the upper limit of human hearing, typically above 20 kHz. In oil recovery applications, frequencies often range from tens of kilohertz to several megahertz, depending on the targeted reservoir properties. Ultrasonic waves propagate through materials as mechanical vibrations, generating oscillations that interact with fluid and solid phases in the reservoir [12].

• Key features of ultrasonic waves include:

1. **High Frequency and Precision:** The high frequency enables localized energy delivery, allowing precise targeting of reservoir zones.
2. **Wave Propagation Modes:** Ultrasonic waves propagate as longitudinal, transverse, or surface waves, each exhibiting unique interactions with reservoir media [13].

• Mechanisms of Action

The unique properties of ultrasonic waves enable them to influence oil recovery through several mechanisms:

1. Cavitation: High-intensity waves create microbubbles in the reservoir fluid. The collapse of these bubbles generates localized pressure and temperature surges, dislodging trapped oil and reducing interfacial tension.
2. Acoustic Streaming: Continuous wave propagation induces fluid motion, enhancing oil mobility and reducing flow resistance in pore spaces.
3. Microstreaming: At the microscopic level, ultrasonic waves promote fluid mixing and particle displacement, aiding in the removal of fine particles and residual oil droplets [14].

- Advantages over Conventional Methods

Ultrasonic waves offer several benefits that make them a superior choice for oil recovery:

1. Environmentally Friendly: Unlike chemical-based methods, ultrasonic waves do not introduce harmful substances into the reservoir, minimizing environmental impact.
2. Cost-Effective: The ability to target specific reservoir zones and reduce dependency on chemicals lowers operational costs.
3. Adaptability: Ultrasonic technology is effective in a wide range of reservoir conditions, including low-permeability and heterogeneous formations.
4. Enhancement of Reservoir Properties: The technology not only mobilizes oil but also improves reservoir connectivity by clearing pore blockages and enhancing permeability [15].

- Relevance to Enhanced Oil Recovery

Ultrasonic waves represent a transformative technology for enhancing oil recovery. By leveraging their unique physical properties, this method addresses many challenges associated with traditional techniques, including environmental risks, operational complexity, and inefficiencies in fluid displacement. Their application across primary, secondary, and tertiary recovery stages demonstrates their versatility and potential to redefine oil production strategies.

Figure 1 illustrates the schematic design and field deployment of ultrasonic tools [16].

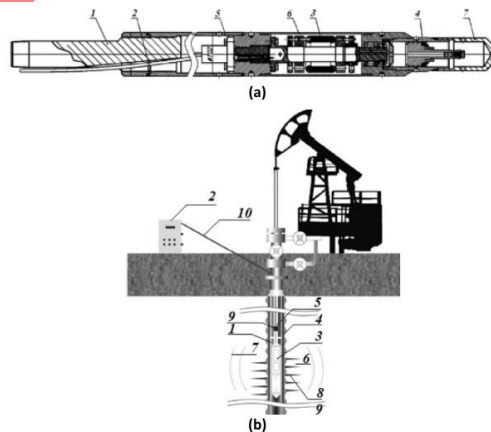


Figure 1) (a) Schematic diagram of general structure of underground ultrasonic transducer. 1-reducer, 2-cable lug, 3-magnetostrictive radiator, 4-hydrocompensator of excess pressure, 5-housing of the tool, 6-housing of the magnetostrictive radiator, and 7-tip. (b) The composition type complete

sets of equipment for high power ultrasonic oil production. 1-anchor, 2-ultrasonic generator, 3-downhole tool, 4- casing, 5-tubing, 6-producing formation, 7-ultrasonic field, 8-perforated zone, 9-sucker-rod pump, and 10-power cable for the downhole tool [11-13].

1.3. Screening Criteria for the Application of Ultrasonic Waves in Oil Recovery

The successful application of ultrasonic waves in enhanced oil recovery (EOR) requires careful evaluation of reservoir conditions to optimize the method's effectiveness. The following screening criteria outline the key factors that determine the suitability of a reservoir for ultrasonic-assisted recovery [17]:

- Reservoir Characteristics
 1. Porosity: Ultrasonic waves are most effective in reservoirs with porosity levels above 5%, as this enhances wave propagation and facilitates fluid movement.
 2. Permeability: Low to moderate permeability reservoirs benefit significantly from ultrasonic stimulation due to its ability to mobilize trapped hydrocarbons and clear pore blockages [18].
- Reservoir Conditions
 1. Depth: Reservoirs at depths between 1,500 and 1,700 meters are ideal for ultrasonic wave propagation, balancing wave penetration and energy dissipation.
 2. Temperature: Ultrasonic waves perform optimally in reservoirs with temperatures between 100°C and 110°C, as these conditions maximize wave efficiency without excessive attenuation [19].
 3. Pressure Stability: Reservoirs with moderate pressure drops are better suited for ultrasonic methods, as stable pressure enhances wave transmission and interaction with reservoir fluids.
- Well Configuration
 1. Completion Design: Wells completed with slotted liners facilitate the effective distribution of ultrasonic energy throughout the reservoir.
 2. Production Decline: Ultrasonic technology is particularly useful for wells experiencing declining production, as it reactivates reservoir fluids and improves recovery rates [20].
- Fluid Properties
 1. Gravity of Reservoir Fluids: Lower gravity fluids respond better to ultrasonic waves, which reduce viscosity and improve mobility.
 2. Presence of Emulsions: Ultrasonic waves are effective in breaking down oil-water emulsions, further enhancing recovery efficiency [21].
- Relevance of Screening Criteria

Table 2 will summarize the screening criteria for applying ultrasonic waves.

Table 2) Criteria for Effective Ultrasonic Wave Application in Reservoirs [17-21].

Criterion	Description	Optimal Range
-----------	-------------	---------------

Production Decline	Degree of decline in reservoir productivity.	Moderate to significant production decline.
Reservoir Porosity	Proportion of pore volume to total rock volume.	Porosity > 5%.
Pressure Conditions	Reservoir pressure suitable for wave propagation.	Moderate, stable pressure.
Temperature Range	Reservoir temperature optimal for ultrasonic wave efficiency.	100–110°C.

By adhering to these criteria, operators can maximize the effectiveness of ultrasonic wave applications in oil recovery. The careful selection of suitable reservoirs ensures that the technology is implemented in conditions where it can achieve the greatest impact, optimizing both recovery rates and operational efficiency [21].

1.4. Challenges in Conventional Oil Recovery Methods

Traditional oil recovery methods such as primary recovery using natural reservoir pressure and secondary techniques like water or gas flooding face significant limitations that hinder their efficiency and sustainability. Addressing these challenges is essential to enhance recovery rates and optimize resource utilization in mature and unconventional reservoirs [22].

- Declining Production Rates

As reservoirs mature, natural pressure declines, leading to reduced production rates. Conventional methods often fail to mobilize remaining hydrocarbons trapped in complex pore structures, resulting in substantial unrecovered reserves [23].

- Limited Sweep Efficiency

Inadequate sweep efficiency is a critical challenge in secondary recovery processes. Injected fluids, such as water or gas, may bypass significant portions of the reservoir, leaving oil unrecovered in bypassed zones [24].

- Fluid Mobility Issues

Heavy and highly viscous oils pose a significant challenge for traditional methods. Their low mobility reduces flow rates and complicates displacement processes, requiring alternative approaches to improve fluid dynamics [25].

- Formation Damage

Wellbore damage caused by fines migration, clay swelling, or scale deposition during production can obstruct fluid flow. Conventional recovery methods often exacerbate these issues, further diminishing reservoir performance [26].

- Environmental and Economic Concerns

Chemical-intensive methods, such as acidizing and hydraulic fracturing, raise environmental concerns due to potential contamination and high-water usage. These methods are also cost-intensive, making them less viable for smaller fields or marginal reserves [27].

- Heterogeneous Reservoirs

Reservoirs with diverse rock properties and fluid compositions pose significant challenges for conventional methods. Uneven permeability, fractures, and compartmentalization result in inefficient fluid displacement and low recovery factors [28].

Need for Alternative Technologies

These limitations highlight the necessity of innovative and sustainable technologies for enhanced oil recovery. Ultrasonic waves offer a promising solution by overcoming many of these challenges [29]:

1. They improve sweep efficiency by mobilizing trapped oil through cavitation and acoustic streaming.
2. They reduce viscosity and enhance fluid flow, particularly for heavy oils.
3. They offer an environmentally friendly alternative by minimizing chemical usage and preserving reservoir integrity.

By addressing these challenges, ultrasonic-assisted recovery methods can unlock untapped potential in mature and unconventional reservoirs, providing a sustainable pathway for optimizing oil production [30].

1.5. Ultrasonic Waves: An Innovative Solution for Enhancing Oil Recovery

The application of ultrasonic waves in oil recovery represents a groundbreaking approach to overcoming the limitations of traditional methods. Leveraging their unique physical properties, ultrasonic waves provide a non-invasive, cost-effective, and environmentally friendly technology for mobilizing trapped hydrocarbons and improving recovery efficiency [31].

- Principles of Ultrasonic Technology

Ultrasonic waves operate by transmitting high-frequency sound energy into reservoir formations. These waves interact with reservoir fluids and rock structures through several key mechanisms:

1. Cavitation: The rapid formation and collapse of microbubbles create localized pressure surges that disrupt interfacial tension and mobilize trapped oil.
2. Acoustic Streaming: The steady fluid motion induced by ultrasonic waves enhances fluid mobility and dislodges fine particles blocking pore spaces.
3. Microstreaming: At the microscopic level, ultrasonic waves promote fluid mixing, increase permeability, and enhance fluid displacement [32,33].

- Advantages of Ultrasonic Waves

Ultrasonic technology offers distinct benefits over conventional recovery methods:

1. Enhanced Recovery Efficiency: By disrupting interfacial tension and mobilizing residual oil, ultrasonic waves access untapped reserves that traditional methods cannot reach.
2. Environmental Sustainability: The method requires minimal use of chemicals, reducing environmental risks and operational complexity.
3. Cost-Effectiveness: Targeted action on specific reservoir zones minimizes energy use and operational costs.
4. Versatility: Ultrasonic waves can be applied across various stages of oil recovery—primary, secondary, and tertiary—making them adaptable to different reservoir conditions [34,35].

- Applications in Oil Recovery

Ultrasonic waves have demonstrated significant potential in laboratory and field studies:

1. Primary Recovery: Stimulating wellbore regions to enhance initial production rates.
2. Secondary Recovery: Improving sweep efficiency by enhancing fluid mobility in heterogeneous reservoirs.
3. Tertiary Recovery: Reducing oil viscosity and breaking down emulsions, increasing the efficacy of chemical flooding and other enhanced oil recovery techniques [36].

By addressing critical challenges such as low sweep efficiency, formation damage, and environmental concerns, ultrasonic waves provide a viable pathway for sustainable oil recovery. Their ability to integrate with conventional and advanced methods further enhances their appeal as a transformative technology in the oil and gas industry [36].

1.6. The Importance of Alternative Technologies for Sustainable Oil Recovery

The growing demand for energy, coupled with declining production rates from mature reservoirs, necessitates the exploration of alternative technologies for oil recovery. Traditional methods often face environmental, economic, and operational constraints, making it imperative to adopt innovative approaches that ensure sustainability while meeting global energy needs [37].

- **Environmental Imperatives**

Conventional oil recovery techniques, such as acidizing and hydraulic fracturing, rely heavily on chemical agents and water resources, contributing to environmental degradation. These methods are associated with [38,39]:

1. Water Contamination: Chemical leakage into surrounding ecosystems.
2. High Carbon Footprint: Energy-intensive operations that increase greenhouse gas emissions.
3. Habitat Disruption: Extensive surface and subsurface interventions affecting biodiversity.

Ultrasonic waves offer an environmentally friendly alternative by minimizing chemical usage, reducing energy consumption, and preserving reservoir integrity. This aligns with global goals to mitigate climate change and promote responsible resource management [40].

- **Economic Viability**

The rising costs of conventional recovery methods challenge the economic sustainability of oil production, especially in marginal or low-production fields. Ultrasonic-assisted recovery:

1. Lowers operational costs by reducing the dependency on expensive chemicals.
2. Extends the economic lifespan of reservoirs by unlocking untapped reserves.
3. Enhances the cost-effectiveness of oil recovery, making it viable for a broader range of fields [41].

- **Technological Advancement**

Advancing oil recovery technologies is essential for optimizing resource utilization and maintaining production levels in aging fields. Ultrasonic waves:

1. Offer a scalable and adaptable solution for diverse reservoir conditions.
2. Integrate seamlessly with existing recovery methods to maximize efficiency.
3. Address technical challenges, such as fluid mobility and pore blockage, that limit the effectiveness of conventional techniques [42].

- **Contribution to Energy Transition**

While the global energy transition emphasizes renewable resources, oil remains a critical component of the energy mix. Sustainable oil recovery technologies like ultrasonic waves play a pivotal role in bridging the gap by enabling more efficient and environmentally responsible extraction processes. This ensures continued energy security while supporting the gradual shift toward cleaner energy sources [43].

Exploring alternative technologies such as ultrasonic waves is essential to overcome the limitations of conventional methods and ensure the sustainability of oil recovery operations. By addressing environmental concerns, improving economic viability, and advancing technological capabilities, ultrasonic-assisted recovery positions itself as a key solution for optimizing production and contributing to global energy sustainability [44].

2. Principles of Ultrasonic Waves

Ultrasonic waves are characterized by their ability to propagate through various media, creating unique interactions between fluids and solids. Their high-frequency vibrations generate mechanical energy that can penetrate reservoir formations, making them a versatile tool for enhanced oil recovery. Understanding their principles is crucial for optimizing their application in oil production [45].

2.1. Fundamental Principles of Ultrasonic Waves and Their Interaction with Oil Reservoirs

The propagation of ultrasonic waves in oil reservoirs involves complex physical phenomena that enhance hydrocarbon recovery. Key principles include:

- **Propagation Through Media**

Ultrasonic waves travel as mechanical vibrations, with their velocity and attenuation influenced by the acoustic properties of the medium. In reservoirs, these waves interact with both fluids and rock formations, altering their physical and chemical states [46].

- **Reflection and Refraction**

When ultrasonic waves encounter boundaries between different media—such as rock and fluid—they undergo reflection, refraction, or scattering. These interactions provide insights into reservoir characteristics, such as porosity and fluid distribution [47].

- **Energy Transfer Mechanisms**

1. **Cavitation:** The rapid formation and collapse of microbubbles in fluids generate localized high-pressure zones, breaking oil-water interfaces and mobilizing trapped hydrocarbons.
2. **Acoustic Streaming:** Continuous pressure gradients created by ultrasonic waves induce fluid motion, enhancing oil mobility and clearing pore blockages.
3. **Thermal Effects:** Ultrasonic waves produce localized heating, reducing oil viscosity and improving flow dynamics [48].

- **Impact on Reservoir Properties**

1. **Enhanced Permeability:** The mechanical vibrations can clear fines and blockages in pore spaces, increasing connectivity within the reservoir.

2. **Modified Wettability:** Ultrasonic waves alter the interaction between rock surfaces and reservoir fluids, promoting conditions favorable for oil displacement [49].

- **Applications in EOR**

These principles underpin the effectiveness of ultrasonic waves in improving oil recovery. By disrupting interfacial forces and enhancing fluid mobility, they provide a sustainable and efficient alternative to conventional recovery methods, particularly in challenging reservoir environments [46-49].

2.2. Mechanisms of Ultrasonic Wave Propagation and Energy Transfer in Porous Media

The propagation of ultrasonic waves through porous media is governed by complex interactions between the wave energy, the fluid-filled pores, and the solid matrix. These interactions are critical for enhancing oil recovery as they alter the physical and dynamic properties of the reservoir [50].

- **Wave Propagation in Porous Media**

1. **Attenuation and Dispersion:**

- Ultrasonic waves experience energy loss (attenuation) as they interact with the heterogeneous structure of porous media.
- Dispersion occurs due to variations in wave speed caused by differences in the acoustic properties of the solid and fluid phases [51].

2. **Multiple Scattering:**

- The complex pore geometry causes waves to scatter repeatedly, redistributing energy and facilitating deeper penetration into the reservoir.
- This scattering effect enhances the uniformity of wave-induced energy delivery across the reservoir [52].

- **Energy Transfer Mechanisms**

1. **Poroelastic Coupling:**

- Ultrasonic waves induce stress in the solid matrix, causing energy transfer between the solid and the fluid phases.
- This poroelastic interaction promotes changes in pore pressure, mobilizing trapped fluids [53].

2. **Viscous Losses and Frictional Damping:**

- Wave energy dissipates through friction between the moving fluid and the pore walls, creating localized heating that reduces oil viscosity [54].

3. **Cavitation Effects:**

- Ultrasonic waves generate microbubbles in the fluid. When these bubbles collapse, they release bursts of energy that break oil-water interfaces and dislodge trapped hydrocarbons [55].

- **Interactions Between Waves and Fluids**

1. **Wave Reflection and Transmission:**

- At the interface of different fluids (e.g., oil and water) or between fluid and rock, part of the wave energy is reflected, and part is transmitted, influencing fluid behavior and mobility [56].

2. **Saturation-Dependent Effects:**

- Fluid saturation significantly impacts wave propagation. For instance, reservoirs with higher oil saturation may exhibit distinct attenuation and reflection patterns compared to water-saturated zones [56].
- Applications to Reservoir Characterization and Oil Recovery
 1. Permeability Estimation:
 - Analyzing wave behavior in porous media provides insights into permeability and porosity, which are critical for reservoir modeling.
 2. Enhanced Fluid Displacement:
 - Ultrasonic waves facilitate the displacement of residual oil by reducing interfacial tension, altering wettability, and clearing pore blockages [57].

The unique propagation and energy transfer mechanisms of ultrasonic waves in porous media underpin their effectiveness in oil recovery. By leveraging these mechanisms, ultrasonic-assisted recovery optimizes fluid mobility, enhances sweep efficiency, and improves overall hydrocarbon extraction in challenging reservoirs [50-57].

2.3. Effects of Frequency, Amplitude, and Power Density on Ultrasonic Wave Penetration and Oil Displacement

The effectiveness of ultrasonic waves in enhancing oil recovery depends significantly on three key parameters: frequency, amplitude, and power density. Optimizing these parameters ensures efficient wave propagation, energy transfer, and hydrocarbon mobilization in the reservoir [58].

- Frequency
 1. Penetration Depth:
 - Lower frequencies allow for deeper penetration into the reservoir by reducing energy attenuation.
 - Higher frequencies are more effective for localized treatment, as they generate stronger cavitation effects but with limited depth.
 - Optimal frequency selection balances penetration depth with the desired intensity of ultrasonic effects [59].
 2. Oil Displacement Efficiency:
 - High-frequency waves are ideal for mobilizing residual oil by disrupting oil-water interfaces through cavitation.
 - Lower-frequency waves enhance sweep efficiency by uniformly distributing energy across larger reservoir zones [60].
- Amplitude
 1. Wave Intensity:
 - Increased amplitude correlates with higher energy delivery to the reservoir, enhancing the ability to overcome capillary forces and mobilize trapped hydrocarbons.
 - Excessively high amplitudes may cause undesirable effects, such as mechanical damage to the reservoir or excessive energy dissipation [61].
 2. Reservoir Interaction:

- High amplitudes are particularly effective in dislodging fine particles and breaking oil-water emulsions, improving reservoir connectivity and fluid mobility [62].
- Power Density
 1. Energy Focus:
 - Higher power densities concentrate ultrasonic energy in specific reservoir zones, optimizing the disruption of interfacial tension and the mobilization of trapped oil.
 - In contrast, lower power densities spread energy more broadly, which may be beneficial for large-area stimulation but less effective in addressing localized issues [63].
 2. Cavitation Intensity:
 - Higher power densities amplify cavitation effects, generating microbubbles that collapse with sufficient energy to dislodge residual oil and enhance permeability [64].
- Combined Effects of Parameters
 1. Synergistic Optimization:
 - The interplay between frequency, amplitude, and power density creates a synergistic effect. For example, moderate frequencies combined with high amplitudes and focused power density maximize oil displacement and recovery efficiency [65].
 2. Reservoir-Specific Adjustment:
 - These parameters must be tailored to reservoir characteristics, including depth, porosity, and fluid composition, to achieve optimal results [66].
- Applications in Oil Recovery
 1. Improved Fluid Mobility:
 - Adjusting ultrasonic parameters enhances fluid flow through pore spaces, reducing blockages and increasing sweep efficiency [67].
 2. Viscosity Reduction:
 - Thermal and cavitation effects induced by optimized ultrasonic waves reduce the viscosity of heavy oils, improving their mobility [68].
 3. Enhanced Displacement:
 - Fine-tuned parameters enable efficient oil displacement in reservoirs with heterogeneous formations or challenging fluid properties [69].

Frequency, amplitude, and power density are critical parameters that determine the success of ultrasonic-assisted oil recovery. By optimizing these factors, operators can enhance wave propagation, maximize energy transfer, and improve the overall efficiency of hydrocarbon extraction. Tailoring these parameters to reservoir-specific conditions ensures effective application and sustainable recovery outcomes [58-69].

3. Application of Ultrasonic Waves in Oil Recovery

The application of ultrasonic waves in oil recovery has emerged as a transformative approach to enhance hydrocarbon production across various recovery stages. By leveraging their unique

physical properties, ultrasonic waves address critical challenges in traditional recovery methods, offering improved efficiency, environmental benefits, and cost-effectiveness [70].

3.1. Ultrasonic-Assisted Enhanced Oil Recovery (UA-EOR) Techniques

Ultrasonic-assisted enhanced oil recovery (UA-EOR) involves the use of high-frequency waves to stimulate reservoirs, mobilize trapped hydrocarbons, and improve fluid dynamics. This technique can be implemented as a standalone method or in conjunction with traditional recovery techniques [71].

- **Mechanisms Driving UA-EOR**
 1. **Cavitation:**
 - The formation and collapse of microbubbles generate localized pressure surges that disrupt interfacial tension, freeing trapped oil droplets.
 2. **Acoustic Streaming:**
 - Continuous fluid motion induced by ultrasonic waves enhances oil mobility and improves sweep efficiency.
 3. **Reservoir Vibration:**
 - Vibrational energy improves permeability by clearing blockages and stimulating the pore network [72].
- **Advantages of UA-EOR**
 1. **Environmental Benefits:**
 - UA-EOR reduces reliance on chemical agents, minimizing environmental risks.
 2. **Cost-Effectiveness:**
 - By targeting specific zones, ultrasonic waves optimize energy use and reduce operational costs.
 3. **Versatility:**
 - This method is effective across different recovery stages and reservoir conditions [73].
- **Applications in Recovery Processes**
 1. **Primary Recovery:**
 - Enhances initial fluid flow by stimulating the near-wellbore region.
 2. **Secondary Recovery:**
 - Improves sweep efficiency during water or gas injection processes.
 3. **Tertiary Recovery:**
 - Facilitates viscosity reduction and emulsion breakdown in enhanced oil recovery (EOR) applications [74].

The principles underlying ultrasonic-assisted oil recovery share remarkable similarities with those used in ultrasonic-assisted extraction techniques in other industries, such as the extraction of bioactive compounds. In both contexts, phenomena like cavitation, acoustic streaming, and microstreaming are employed to enhance material displacement and improve process efficiency. For instance, cavitation induces localized high-pressure zones that break interfacial barriers, while acoustic streaming facilitates fluid motion and material transport [75,76].

3.2. Utilization of Ultrasonic Waves in Primary, Secondary, and Tertiary Recovery Processes

Ultrasonic waves play a significant role in all stages of oil recovery, offering solutions tailored to specific challenges at each stage [77-80]:

- **Primary Recovery**
 1. **Reservoir Activation:** Ultrasonic stimulation enhances production by mobilizing oil near the wellbore.
 2. **Productivity Increase:** By improving permeability and fluid mobility, ultrasonic waves maximize early production rates.
- **Secondary Recovery**
 1. **Enhanced Sweep Efficiency:** The combination of acoustic streaming and cavitation ensures better displacement of oil by injected water or gas.
 2. **Reservoir Connectivity:** Ultrasonic waves clear pore blockages, improving connectivity and fluid flow pathways.
- **Tertiary Recovery (EOR)**
 1. **Viscosity Reduction:** Ultrasonic waves generate localized heating, lowering the viscosity of heavy oil for improved mobility.
 2. **Interfacial Tension Modification:** Acoustic energy disrupts oil-water interfaces, aiding in the displacement of residual oil.
 3. **Chemical-Free Alternative:** Ultrasonic-assisted methods reduce the need for harsh chemicals, aligning with environmental goals.

Ultrasonic waves provide a versatile and environmentally friendly solution for enhancing oil recovery across primary, secondary, and tertiary stages. By leveraging mechanisms like cavitation, acoustic streaming, and viscosity reduction, they improve fluid mobility, boost sweep efficiency, and unlock previously inaccessible reserves, offering a sustainable alternative to traditional recovery methods [77-80].

3.3. Case Studies Highlighting the Efficacy of Ultrasonic Waves in Various Geological Formations

- **Research interest**

Between 2010 and 2024, ultrasonic-assisted enhanced oil recovery (UA-EOR) has seen increasing research interest. Studies have focused on its ability to improve recovery efficiency, particularly in low-permeability and heavy oil reservoirs, by leveraging mechanisms like cavitation, acoustic streaming, and viscosity reduction. Laboratory experiments and limited field studies show promise, but the scalability and economic viability of UA-EOR remain active areas of investigation [1-80].

- **Research Highlights by Period**

1. **2010–2015:** Early studies explored the fundamental mechanisms of ultrasonic waves, focusing on laboratory-scale experiments. Research emphasized their effects on interfacial tension, oil viscosity reduction, and permeability improvement.

2. 2016–2020: Research expanded to hybrid methods combining ultrasonic waves with other EOR techniques, such as chemical flooding. Studies also began addressing parameter optimization for different reservoir types.
 3. 2021–2024: Recent studies have reviewed field applications, showcasing advancements in ultrasonic equipment and its potential to complement or replace conventional methods like hydraulic fracturing and acidizing [1-80].
- Comparative Analysis of hydraulic fracturing and acidizing vs. UA-EOR
 - Hydraulic fracturing and acidizing can cause environmental concerns due to chemical usage and risks to groundwater.
 - UA-EOR offers a greener alternative, requiring less chemical input while improving oil recovery efficiency in specific reservoir conditions.

While UA-EOR is not yet as widely adopted as hydraulic fracturing or acidizing, its lower environmental impact and operational benefits make it a promising tool for improved oil recovery. Continued research and field trials are essential to validate its cost-effectiveness and scalability [1-80].

In Figure 2 research trends in ultrasonic-assisted EOR was shown that was created by MATLAB.

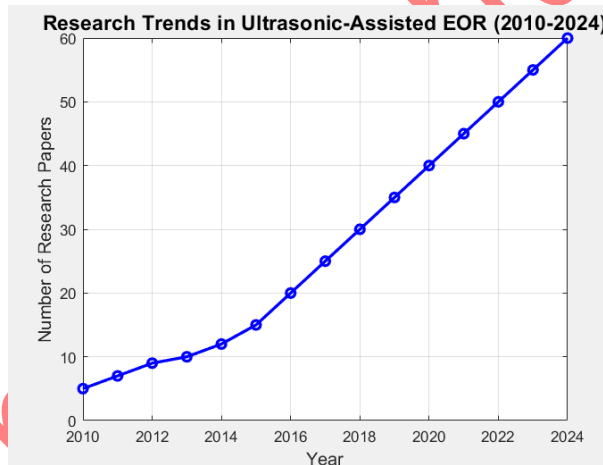


Figure 2) research trends in ultrasonic-assisted EOR [1-80].

- Case Studies

Table 3 summarizes the application of ultrasonic wave technology in various reservoir types to enhance oil recovery.

Table 3) Application of ultrasonic wave technology in various reservoir types [1-80].

Case Study	Reservoir Type	Objective	Method	Results
1	Sandstone	Evaluate impact on oil recovery	High-intensity ultrasonic treatment	Enhanced fluid mobility, reduced viscosity, improved sweep efficiency
2	Carbonate	Assess application in stimulation	Ultrasonic waves to optimize	Enhanced fluid displacement, increased sweep efficiency, improved recovery factors

			connectivity, reduce trapped oil	
3	Shale	Investigate feasibility in shale oil production	Ultrasonic technology to induce microfractures, improve fluid flow	Enhanced fracture network development, increased permeability, enhanced oil mobility
4	Unconventional (Tight Gas, Oil Sands)	Explore application in unconventional recovery	Ultrasonic treatments to enhance stimulation, improve fluid mobility	Enhanced gas/oil production, reduced viscosity constraints, improved sweep efficiency

Table 4 will consolidate the case studies mentioned above.

Table 4) Summary of Case Studies on Ultrasonic-Assisted Oil Recovery [1-80].

Reservoir Type	Objective	Methods Used	Results Observed
Sandstone	Enhance oil recovery in high-permeability formations.	Ultrasonic waves at moderate frequencies.	Increased recovery rates; improved fluid mobility.
Carbonate	Mobilize trapped hydrocarbons.	Combined ultrasonic and chemical methods.	Enhanced sweep efficiency; improved wettability.
Shale	Address low permeability issues.	High-power ultrasonic waves.	Reduced pore blockages; localized permeability enhancement.

In the following two more case studies with detail were mentioned:

1. A Case Study of Western Siberia and Samara Region Fields:

The comparison of production rates in the Western Siberia and Samara region fields is illustrated in the figure 3. As shown, before the ultrasonic effects, the production rates in each field were 3.92 and 8.4, respectively. After the application of ultrasonic effects, an increase in production rates was observed, with current rates reaching 8.32 and 18.6 for each field. For the Western Siberia field, after 2.5 to 3 months, the production rate has reached approximately 7.7, and for the Samara region field, it has reached around 11.5, indicating the significant impact of ultrasonic effects on these two fields [82].

Another comparison for the Western Siberia and Samara region fields is provided. The production rates before and after ultrasonic effects for the Western Siberia field are 0.23 and 0.35, and for the Samara region field are 0.42 and 0.64, showing that our experiments and the effects of ultrasonic are effective and fruitful.

The production flow rates before and after ultrasonic effects for the Western Siberia field were 20.69 and 32.07, and for the Samara region field were 32 and 54, indicating a significant impact of ultrasonic effects [82].

When comparing the water percentage, we find that for the Western Siberia field, it was 72.3 before and 68.27 after the operation, and for the Samara region field, it was 70 before and 61.8 after, once again demonstrating the positive impact of ultrasonic operations on the fields [82].

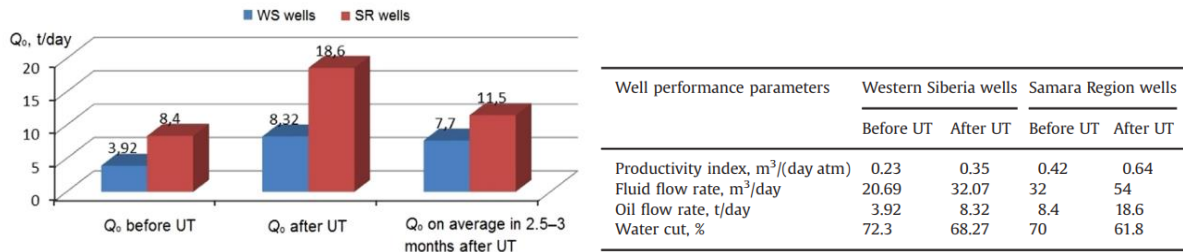


Figure 3) Effect of ultrasonic treatment (UT) on well performance parameters in Western Siberia and Samara Region [82].

2. Case studies from the North:

Field trials conducted in Northern regions have demonstrated substantial enhancements in hydrocarbon recovery rates when employing ultrasonic technology. Specifically, ultrasonic waves have proven highly effective in mobilizing trapped hydrocarbons and optimizing sweep efficiency within low-permeability reservoirs. These achievements underscore the adaptability of ultrasonic-assisted recovery techniques across a wide range of geological formations [82].

For instance, in a recent study conducted in the Northern region, the application of ultrasonic waves resulted in an increase in oil recovery rates compared to conventional methods. Moreover, the time required to reach peak production was reduced by months. These findings are particularly significant given the challenging conditions of low permeability and high viscosity commonly associated with reservoirs in this region [82].

Mechanistically, ultrasonic waves induce several beneficial effects within the reservoir. By creating localized pressure fluctuations, these waves can:

- Dislodge trapped hydrocarbons: Ultrasonic cavitation and acoustic streaming disrupt the adhesion between hydrocarbons and reservoir rock surfaces, facilitating their mobilization.
- Enhance permeability: Microfractures and pore-throat enlargement induced by ultrasonic waves can significantly improve fluid flow through the reservoir.
- Reduce interfacial tension: Ultrasonic waves can lower the interfacial tension between oil and water, promoting more efficient displacement of hydrocarbons.

The versatility of ultrasonic technology is further highlighted by its successful application in other types of reservoirs, e.g., carbonate, shale. In these formations, ultrasonic waves have been shown to specific benefits, e.g., improve fracture network connectivity, enhance gas production [82].

4. Mechanisms of Enhanced Oil Recovery by Ultrasonic Waves

Ultrasonic waves enhance oil recovery by exploiting their high-frequency energy to alter the physical, chemical, and mechanical properties of fluids and reservoir formations. These waves trigger a range of processes, such as cavitation, acoustic streaming, and thermal effects, which collectively improve fluid mobility, dislodge trapped hydrocarbons, and enhance permeability. Understanding these mechanisms is crucial for optimizing the application of ultrasonic-assisted oil recovery (UA-EOR) techniques in diverse reservoir conditions [83,84].

Table 5 will help summarize the key mechanisms.

Table 5) Mechanisms of Ultrasonic Waves in Oil Reservoirs [83,84].

Mechanism	Description	Effect on Recovery
Wave Attenuation	Loss of energy as waves propagate through heterogeneous media.	Reduces wave penetration but enhances localized effects.
Poroelastic Effects	Stress-induced deformation of the reservoir matrix interacting with fluid phases.	Improves fluid displacement and connectivity between pore spaces.
Fluid Flow-Induced Attenuation	Reduction in wave energy caused by interactions with fluid motion in reservoir pores.	Enhances mobility by disrupting oil-water interfaces and clearing pore blockages.
Cavitation	Formation and collapse of microbubbles, creating localized high-pressure zones.	Dislodges trapped hydrocarbons and reduces interfacial tension.
Acoustic Streaming	Steady fluid motion induced by ultrasonic waves.	Improves sweep efficiency and clears blockages in fluid pathways.

Figure 4 illustrates the improvement in oil recovery rates achieved through the use of ultrasonic waves compared to conventional methods. It shows how ultrasonic technology can significantly boost recovery efficiency by enhancing fluid mobility, reducing interfacial tension, and improving reservoir connectivity. The graph emphasizes the added value of ultrasonic-assisted recovery, making a strong case for its implementation in challenging reservoirs, and also it was created in MATLAB by exploring different studies [85].

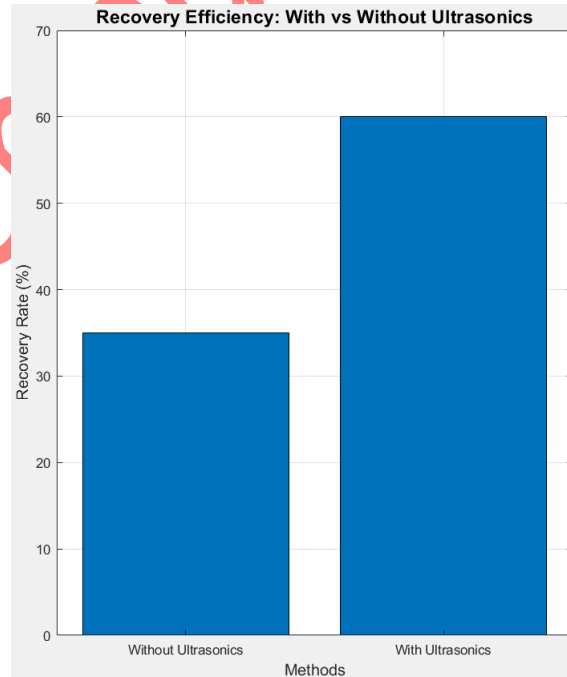


Figure 4) Recovery Efficiency Graph (With vs. Without Ultrasonics) [83-85].

4.1. Reduction of Interfacial Tension and Wettability Alteration

One of the fundamental mechanisms through which ultrasonic waves improve oil recovery is by reducing interfacial tension and altering wettability. The high-frequency vibrations generate cavitation microbubbles that form and collapse within the reservoir fluids. This dynamic process creates localized high-pressure and high-temperature zones, disrupting oil-water interfaces. The reduction in interfacial tension decreases the capillary forces holding oil droplets in pore spaces, facilitating their release and flow toward production wells.

Additionally, ultrasonic waves alter the wettability of reservoir rocks. By modifying the surface energy of rock pores, ultrasonic energy shifts the system from an oil-wet to a more water-wet condition, which is favorable for oil displacement. This alteration improves the overall efficiency of fluid flow and enhances recovery from reservoirs that are traditionally challenging to produce [86].

4.2. Enhanced Fluid Mobility Through Acoustic Effects

Ultrasonic waves significantly enhance fluid mobility by inducing acoustic streaming and microstreaming. Acoustic streaming refers to the steady fluid motion generated by the propagation of ultrasonic waves through the reservoir. This motion reduces resistance to flow, clears pore blockages, and improves the sweep efficiency of displacing fluids. It also aids in the redistribution of reservoir fluids, ensuring a more uniform displacement of hydrocarbons.

At the microscopic level, ultrasonic waves induce microstreaming, which generates localized vortices and eddies within the pore spaces. These dynamic forces dislodge fine particles and emulsified oil droplets, clearing pathways for hydrocarbons to flow more freely. Together, acoustic streaming and microstreaming mitigate the effects of reservoir heterogeneity, enhancing recovery efficiency in reservoirs with complex geological structures [87].

4.3. Permeability Enhancement and Thermal Effects

The mechanical and thermal effects of ultrasonic waves play a vital role in improving reservoir permeability and reducing oil viscosity. High-frequency vibrations clear pore blockages caused by fines, clay particles, or other obstructions, restoring reservoir connectivity and enhancing fluid flow pathways. In some cases, ultrasonic waves generate microfractures in low-permeability rock formations, further increasing permeability and facilitating hydrocarbon production.

Ultrasonic waves also produce localized heating through energy dissipation. This thermal effect reduces the viscosity of heavy oils, improving their mobility and enabling their extraction from challenging reservoirs. Moreover, the heat generated can enhance chemical reactions in certain EOR methods, making ultrasonic-assisted techniques compatible with hybrid recovery approaches [88].

Through mechanisms such as interfacial tension reduction, fluid mobility enhancement, and permeability improvement, ultrasonic waves provide a robust solution to the challenges of traditional recovery methods. These processes work synergistically to increase hydrocarbon production, making ultrasonic-assisted recovery a versatile and effective tool for diverse reservoir conditions [86-88].

5. Advantages, Challenges, and Future Directions of Ultrasonic-Assisted Oil Recovery

Ultrasonic-assisted oil recovery (UA-EOR) stands out as a transformative technology that addresses the limitations of conventional recovery methods. By utilizing high-frequency sound waves, UA-EOR enhances recovery efficiency while reducing environmental impact and operational costs. However, several challenges, such as scalability and reservoir-specific optimization, must be overcome to unlock its full potential. This section explores the advantages, identifies challenges, and outlines the future directions for this innovative technology [89].

Figure 5 compares the economic aspects of ultrasonic-assisted oil recovery (UA-EOR) and conventional recovery methods. It highlights the capital and operational costs associated with each method, showcasing UA-EOR's potential for lower operational expenses due to reduced energy and chemical usage. The graph provides a visual representation of cost-efficiency, which is essential for decision-making in field applications, and it was generated in MATLAB by exploring studies [90].

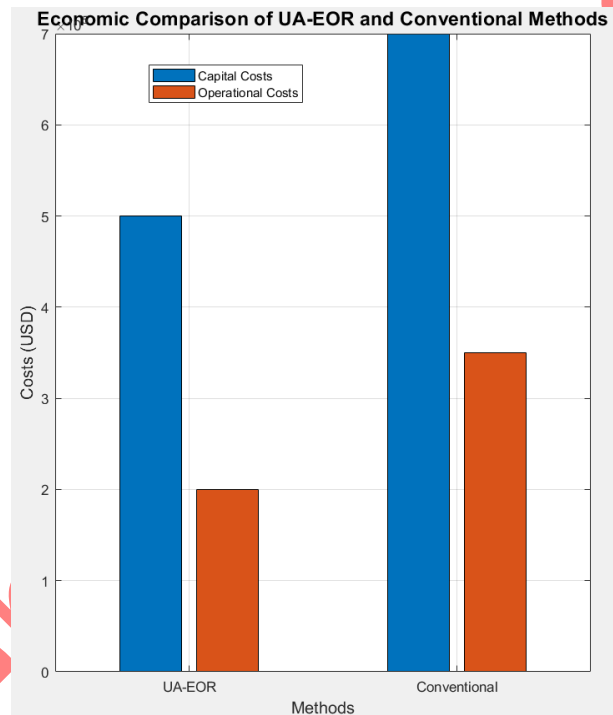


Figure 5) Economic Comparison Chart (UA-EOR vs. Conventional Methods) [89,90].

5.1. Advantages of Ultrasonic-Assisted Oil Recovery

UA-EOR offers significant advantages that make it a promising alternative or complement to traditional recovery methods. Its ability to enhance recovery efficiency without extensive use of chemicals makes it environmentally friendly and aligns with sustainability goals. By reducing interfacial tension and mobilizing trapped hydrocarbons, ultrasonic waves improve recovery rates in reservoirs where conventional methods struggle, such as those with low permeability or heavy oils [91].

The technology is also highly adaptable, capable of integration with primary, secondary, and tertiary recovery stages. This flexibility allows it to target specific challenges across various reservoir conditions. Additionally, UA-EOR requires relatively low energy input and can be precisely localized, reducing operational costs and improving energy efficiency. Its compatibility

with other recovery methods, such as chemical flooding and thermal EOR, further increases its applicability and potential [92].

Table 6 will provide an economic perspective to strengthen the discussion of UA-EOR's benefits.

Table 6) Economic Factors Related to Ultrasonic Wave Technologies [90-92].

Economic Factor	Description	Implications
Capital Investment	Cost of deploying ultrasonic equipment, including installation and maintenance.	Initial expense; higher in marginal fields; ROI depends on recovery enhancement.
Operational Costs	Energy consumption, system monitoring, and maintenance during operation.	Generally lower than chemical-based methods; optimized with renewable energy integration.
Enhanced Recovery Benefits	Increased recovery rates and economic lifespan of reservoirs.	Boosts production from mature or marginal fields; justifies initial investment.
Risk Assessments	Operational risks, scalability issues, and reservoir-specific limitations.	Economic feasibility depends on the mitigation of deployment risks and consistent performance.

Table 7 will provide a clear comparison between ultrasonic and traditional recovery methods.

Table 7) Advantages of Ultrasonic Stimulation Compared to Traditional Methods [90-92].

Advantage	Explanation
Environmental Impact	Reduces chemical usage, lowering ecological risks.
Efficiency	Enhances recovery through targeted energy delivery and improved fluid mobility.
Accuracy	Precisely targets specific reservoir zones, reducing unnecessary resource consumption.
Production Capability	Unlocks reserves in low-permeability formations and heavy oil reservoirs.

5.2. Challenges in Implementing Ultrasonic-Assisted Oil Recovery

Despite its advantages, UA-EOR faces several challenges that limit its widespread adoption. The scalability of laboratory and pilot-scale results to field-scale operations remains a significant hurdle. Ultrasonic waves may lose efficiency in larger reservoirs due to energy dissipation and attenuation, making it difficult to achieve uniform stimulation across extensive areas [93].

Another challenge is the optimization of ultrasonic parameters such as frequency, amplitude, and power density for different reservoir conditions. Reservoirs vary in terms of depth, fluid composition, and geological complexity, requiring a tailored approach for each application.

Additionally, the initial investment required for deploying ultrasonic equipment can be a barrier, particularly for marginal fields or smaller operators. The economic feasibility of UA-EOR must be clearly demonstrated to encourage broader industry adoption [94].

5.3. Future Directions for Ultrasonic-Assisted Oil Recovery

The future of UA-EOR lies in technological advancements and the development of integrative recovery strategies. Hybrid approaches that combine ultrasonic waves with other recovery techniques, such as chemical EOR or CO₂ injection, have the potential to overcome current limitations while maximizing efficiency. For instance, ultrasonic waves can enhance the dispersion and activation of injected chemicals, increasing their effectiveness in mobilizing hydrocarbons [95].

Advances in modeling and simulation technologies can provide a deeper understanding of wave behavior in complex reservoirs, enabling precise optimization of ultrasonic parameters. This knowledge will be critical for designing systems tailored to specific reservoir conditions. Furthermore, the development of cost-effective and energy-efficient ultrasonic equipment will make the technology more accessible, particularly for small-scale and marginal field applications. As the industry transitions toward sustainability, integrating UA-EOR with renewable energy sources, such as solar or wind power, could further reduce its environmental footprint. Research into combining ultrasonic technologies with low-impact drilling and production practices will also contribute to a more sustainable oil recovery ecosystem [96-100].

Ultrasonic-assisted oil recovery presents a viable solution to many of the challenges faced by conventional recovery methods. Its advantages, including environmental benefits, operational flexibility, and cost-effectiveness, position it as a key technology for the future of enhanced oil recovery. Addressing its current challenges through technological innovation and integrative approaches will unlock its full potential, making it a cornerstone of sustainable hydrocarbon production [100-105].

6. Findings, Implications, and Future Directions

Ultrasonic-assisted oil recovery (UA-EOR) has emerged as a cutting-edge technology with the potential to address the limitations of traditional oil recovery methods. By leveraging high-frequency sound waves, it enhances oil recovery efficiency through mechanisms like interfacial tension reduction, fluid mobility improvement, and permeability enhancement. While the technology offers significant advantages, challenges such as scalability and reservoir-specific optimization need to be addressed to maximize its effectiveness. This section summarizes the study's findings, discusses its practical implications, and outlines recommendations for future research and application [1-105].

6.1. Summary of Findings

The application of ultrasonic waves in oil recovery has demonstrated several key benefits, including improved hydrocarbon mobilization, enhanced fluid dynamics, and reduced environmental impact. The principles underlying ultrasonic technology such as cavitation, acoustic streaming, and microstreaming provide a robust foundation for addressing complex reservoir conditions. The versatility of UA-EOR enables its integration with primary, secondary, and tertiary

recovery stages, making it adaptable to a wide range of reservoirs, including those with heavy oils or low permeability.

However, the technology's effectiveness depends on optimizing parameters such as frequency, amplitude, and power density, which vary based on reservoir characteristics. Laboratory studies and pilot-scale applications have shown promising results, but the challenge lies in translating these successes to field-scale operations [1-96].

6.2. Practical Implications for the Oil and Gas Industry

UA-EOR presents an opportunity for the oil and gas industry to improve recovery efficiency while aligning with sustainability goals. The environmental benefits of ultrasonic technology, including minimal chemical usage and reduced energy requirements, make it an attractive option for operators seeking to reduce their ecological footprint. Its ability to enhance recovery in mature and marginal fields can extend the economic lifespan of reservoirs, contributing to the efficient utilization of existing resources [97-100].

In addition, the compatibility of ultrasonic waves with other recovery techniques, such as chemical flooding and thermal EOR, opens the door for hybrid solutions that combine the strengths of multiple methods. These integrative approaches can maximize recovery efficiency, particularly in complex or heterogeneous reservoirs [1-97].

6.3. Recommendations for Future Research and Development

To fully realize the potential of ultrasonic-assisted oil recovery, future research should focus on several key areas [100-105]:

1. Scalability and Field Applications:
 - Investigate the performance of ultrasonic waves in large-scale field operations to address challenges such as energy attenuation and uniform stimulation.
 - Develop advanced equipment capable of delivering consistent and efficient ultrasonic energy across extensive reservoirs.
2. Optimization of Parameters:
 - Conduct reservoir-specific studies to optimize ultrasonic parameters, including frequency, amplitude, and power density, for diverse geological conditions.
 - Leverage machine learning and simulation tools to predict and customize parameter settings for maximum efficiency.
3. Cost-Effectiveness and Energy Efficiency:
 - Focus on reducing the operational costs of ultrasonic systems through innovations in equipment design and energy consumption.
 - Explore the integration of renewable energy sources, such as solar or wind power, to enhance the sustainability of UA-EOR.
4. Hybrid Recovery Methods:
 - Investigate the synergy between ultrasonic waves and other EOR techniques, such as chemical flooding, thermal methods, and CO₂ injection, to create hybrid solutions that overcome the limitations of individual methods.

By addressing these areas, future developments can ensure that ultrasonic technology becomes a cornerstone of sustainable oil recovery practices, aligning industry needs with environmental stewardship.

7. Conclusion

Ultrasonic-assisted oil recovery (UA-EOR) represents a significant breakthrough in the field of enhanced oil recovery (EOR) technologies. By leveraging high-frequency sound waves, this innovative approach addresses key challenges such as low recovery efficiency, reservoir heterogeneity, and the environmental impact of conventional methods. Its ability to reduce interfacial tension, enhance fluid mobility, and improve reservoir permeability positions UA-EOR as a versatile and effective tool for optimizing hydrocarbon production in a wide range of reservoir conditions.

Moreover, UA-EOR stands out as an environmentally friendly alternative to traditional techniques like hydraulic fracturing and acidizing, as it minimizes chemical usage and reduces the risks associated with reservoir damage. Its adaptability across primary, secondary, and tertiary recovery stages further enhances its applicability, making it a valuable addition to the oil and gas industry's sustainability efforts.

While the potential of UA-EOR is clear, challenges such as scaling laboratory successes to field operations, optimizing ultrasonic parameters for diverse reservoir settings, and addressing initial implementation costs remain. Addressing these issues through targeted research, advanced modeling, and innovative equipment design will be essential for realizing its full potential.

Looking ahead, the integration of UA-EOR with hybrid recovery techniques, as well as its alignment with renewable energy sources, could redefine the industry's approach to sustainable resource management. By overcoming existing challenges and embracing technological advancements, ultrasonic-assisted oil recovery has the capacity to revolutionize the future of hydrocarbon production, ensuring both economic viability and environmental responsibility.

8. References

- [1] Tahmasebi-Boldaji, R. (2023). The Effect of Ultrasonic Waves on Crude Oil Recovery. In *Topics on Oil and Gas*. IntechOpen. DOI: 10.5772/intechopen.106494
- [2] Denysiuk, I., Skurativska, I., Hubar, I., Saliuk-Kravchenko, O., & Taraduda, D. (2024). Wave Methods for Oil Extraction Enhancing: Theoretical Support, Safety Issues, and Prospects. In *Systems, Decision and Control in Energy VI: Volume I: Energy Informatics and Transport* (pp. 329-347). Cham: Springer Nature Switzerland. ISBN: 978-3-031-68372-5
- [3] Shaker, D. H., Ibrahim, R. I., & Oudah, M. K. (2024). Conventional and Unconventional Enhanced Oil Recovery Development trend of Ultrasound Application in EOR. *Iraqi Journal of Oil and Gas Research (IJOGR)*, 4(1), 76-96. DOI: [10.55699/ijogr.2024.0401.1065](https://doi.org/10.55699/ijogr.2024.0401.1065)
- [4] Liu, T., Hou, C., Li, H., Dahlen, P., & Guo, Y. (2024). The impact of solid particles and oil characteristics on the separation efficacy of oil sludge ultrasonic treatment. *Chemical Engineering and Processing-Process Intensification*, 205, 109965. DOI: <https://doi.org/10.1016/j.cep.2024.109965>
- [5] Kaïrgeldina, L. K., & Sarsenbekuly, B. (2024). Alternative Methods of thermal Oil Recovery: A Review. *Kazakhstan journal for oil & gas industry*, 6(1), 50-63. DOI: <https://doi.org/10.54859/kjogi108692>
- [6] Taherynia, M. H., Fatemi Aghda, S. M., & Fahimifar, A. (2023). Effects of ultrasonic waves on water imbibition into oil-wet carbonate reservoirs (a case study). *Petroleum Science and Technology*, 41(1), 14-29. DOI: <https://doi.org/10.1080/10916466.2021.2024226>
- [7] Dengae, V. A., Kayumov, A. A., Getalov, A. A., Aliev, F. A., Baimukhametov, G. F., Sargin, B. V., ... & Vakhin, A. V. (2023). Chemical Viscosity Reduction of Heavy Oil by Multi-Frequency Ultrasonic Waves with the Main Harmonics of 20–60 kHz. *Fluids*, 8(4), 136. DOI: <https://doi.org/10.3390/fluids8040136>

- [8] Otumudia, E., Hamidi, H., Jadhawar, P., & Wu, K. (2022). The utilization of ultrasound for improving oil recovery and formation damage remediation in petroleum reservoirs: review of most recent researches. *Energies*, 15(13), 4906. DOI: <https://doi.org/10.3390/en15134906>
- [9] Agi, A., Junin, R., Jaafar, M. Z., Sidek, M. A., Yakasai, F., Gbadamosi, A., & Oseh, J. (2022). Laboratory evaluation to field application of ultrasound: A state-of-the-art review on the effect of ultrasonication on enhanced oil recovery mechanisms. *Journal of Industrial and Engineering Chemistry*, 110, 100-119. DOI: <https://doi.org/10.1016/j.jiec.2022.03.030>
- [10] Razavifar, M., Qajar, J., & Riazi, M. (2022). Experimental study on pore-scale mechanisms of ultrasonic-assisted heavy oil recovery with solvent effects. *Journal of Petroleum Science and Engineering*, 214, 110553. DOI: <https://doi.org/10.1016/j.petrol.2022.110553>
- [11] Feng, J., Yan, T., Cao, Y., & Sun, S. (2022). Ultrasonic-assisted rock-breaking technology and oil and gas drilling applications: A review. *Energies*, 15(22), 8394. DOI: <https://doi.org/10.3390/en15228394>
- [12] Adil, M., & Onaizi, S. A. (2022). Pickering nanoemulsions and their mechanisms in enhancing oil recovery: A comprehensive review. *Fuel*, 319, 123667. DOI: <https://doi.org/10.1016/j.fuel.2022.123667>
- [13] Agi, A., Junin, R., Jaafar, M. Z., Amin, N. A. S., Sidek, M. A., Nyakuma, B. B., ... & Azli, N. B. (2022). Ultrasound-assisted nanofluid flooding to enhance heavy oil recovery in a simulated porous media. *Arabian Journal of Chemistry*, 15(5), 103784. DOI: <https://doi.org/10.1016/j.arabjc.2022.103784>
- [14] Dargi, M., Khamenechi, E., & Mahdavi Kalatehno, J. (2023). Optimizing acidizing design and effectiveness assessment with machine learning for predicting post-acidizing permeability. *Scientific Reports*, 13(1), 11851. DOI: 10.1038/s41598-023-39156-9. PMID: 37481625; PMCID: PMC10363159.
- [15] Norouzpour, M., Azdarpour, A., Santos, R. M., Esfandiarian, A., Nabipour, M., Mohammadian, E., ... & Keshavarz, A. (2023). Comparative static and dynamic analyses of solvents for removal of asphaltene and wax deposits above-and below-surface at an Iranian carbonate oil field. *ACS omega*, 8(28), 25525-25537. DOI: 10.1021/acsomega.3c03149. PMID: 37483249; PMCID: PMC10357422.
- [16] Gong, X., Ma, X., Liu, Y., & Li, G. (2022). Advances in hydraulic fracture propagation research in shale reservoirs. *Minerals*, 12(11), 1438. DOI: <https://doi.org/10.3390/min12111438>
- [17] Nixon, S. L., Plominsky, A. M., Hernandez-Becerra, N., Boothman, C., & Bartlett, D. H. (2023). Microbial communities in freshwater used for hydraulic fracturing are unable to withstand the high temperatures and pressures characteristic of fractured shales. *Access Microbiology*, 5(4), 000515-v3. DOI: 10.1099/acmi.0.000515.v3. PMID: 37223063; PMCID: PMC10202394.
- [18] Benhamou, J., Jami, M., Mezhab, A., Henry, D., & Botton, V. (2023). Numerical simulation study of acoustic waves propagation and streaming using MRT-lattice Boltzmann method. *International Journal for Computational Methods in Engineering Science and Mechanics*, 24(1), 62-75. DOI: <https://doi.org/10.1080/15502287.2022.2050844>
- [19] Liu, P., Liu, A., Liu, S., & Qi, L. (2022). Experimental evaluation of ultrasound treatment induced pore structure and gas desorption behavior alterations of coal. *Fuel*, 307, 121855. DOI: <https://doi.org/10.1016/j.fuel.2021.121855>
- [20] Stringfellow, W. T., Camarillo, M. K., Domen, J. K., & Shonkoff, S. B. (2017). Comparison of chemical-use between hydraulic fracturing, acidizing, and routine oil and gas development. *PLoS One*, 12(4), e0175344. DOI: 10.1371/journal.pone.0175344. PMID: 28422971; PMCID: PMC5396893.
- [21] Li, Y., Zhou, F., Li, B., Cheng, T., Zhang, M., Wang, Q., ... & Liang, T. (2022). Optimization of fracturing fluid and retarded acid for stimulating tight naturally fractured bedrock reservoirs. *ACS omega*, 7(29), 25122-25131. DOI: 10.1021/acsomega.2c01612. PMID: 35910177; PMCID: PMC9330227.
- [22] Khalili, Y., Rafiei, Y., & Sharifi, M. (2022). Reservoir Characterization by Applying Pressure Transient Analysis on Data Obtained from Electrical Submersible Pumps. *Journal of Petroleum Research*, 32(126), 110-125. DOI: [10.22078/pr.2022.4816.3158](https://doi.org/10.22078/pr.2022.4816.3158)

- [23] Meribout, M. (2018). On using ultrasonic-assisted enhanced oil recovery (EOR): recent practical achievements and future prospects. *IEEE Access*, 6, 51110-51118.
- [24] Shields IV, C. W., Cruz, D. F., Ohiri, K. A., Yellen, B. B., & Lopez, G. P. (2016). Fabrication and operation of acoustofluidic devices supporting bulk acoustic standing waves for sheathless focusing of particles. *Journal of Visualized Experiments: JoVE*, (109), 53861. DOI: 10.3791/53861. PMID: 27022681; PMCID: PMC4828217.
- [25] Hamidi, H., Haddad, A. S., Otumudia, E. W., Rafati, R., Mohammadian, E., Azdarpour, A., ... & Tanujaya, E. (2021). Recent applications of ultrasonic waves in improved oil recovery: A review of techniques and results. *Ultrasonics*, 110, 106288. DOI: <https://doi.org/10.1016/j.ultras.2020.106288>
- [26] Naderi, K., & Babadagli, T. (2010). Influence of intensity and frequency of ultrasonic waves on capillary interaction and oil recovery from different rock types. *Ultrasonics sonochemistry*, 17(3), 500-508. DOI: <https://doi.org/10.1016/j.ultsonch.2009.10.022>
- [27] Abdulfatah, H. K. (2018, September). Application of ultrasonic waves in enhancing oil recovery in secondary recovery phase. In *SPE Annual Technical Conference and Exhibition?* (p. D023S099R006). SPE. DOI: <https://doi.org/10.2118/194031-STU>
- [28] Li, X., Pu, C., Chen, X., Huang, F., & Zheng, H. (2021). Study on frequency optimization and mechanism of ultrasonic waves assisting water flooding in low-permeability reservoirs. *Ultrasonics Sonochemistry*, 70, 105291. DOI: <https://doi.org/10.1016/j.ultsonch.2020.105291>
- [29] Hamidi, H., Rafati, R., Junin, R. B., & Manan, M. A. (2012). A role of ultrasonic frequency and power on oil mobilization in underground petroleum reservoirs. *Journal of Petroleum Exploration and Production Technology*, 2, 29-36. DOI: <https://doi.org/10.1007/s13202-012-0018-x>
- [30] Alhomadhi, E., Amro, M., & Almobarky, M. (2014). Experimental application of ultrasound waves to improved oil recovery during waterflooding. *Journal of King Saud University-Engineering Sciences*, 26(1), 103-110. DOI: <https://doi.org/10.1016/j.jksues.2013.04.002>
- [31] Ragab, A. M., & Fouad Snosy, M. (2015, October). The effect of ultrasonic waves of EOR on the relative permeability curves. In *SPE Kuwait Oil and Gas Show and Conference* (pp. SPE-175410). SPE. DOI: <https://doi.org/10.2118/175410-MS>
- [32] Agi, A., Junin, R., & Chong, A. S. (2018). Intermittent ultrasonic wave to improve oil recovery. *Journal of Petroleum Science and Engineering*, 166, 577-591. DOI: <https://doi.org/10.1016/j.petrol.2018.03.097>
- [33] Dehshibi, R. R., Mohebbi, A., Riazi, M., & Niakousari, M. (2018). Experimental investigation on the effect of ultrasonic waves on reducing asphaltene deposition and improving oil recovery under temperature control. *Ultrasonics Sonochemistry*, 45, 204-212. DOI: <https://doi.org/10.1016/j.ultsonch.2018.03.023>
- [34] Khalili, Y., Hashemizadeh, A., & Yasemi, S. (2022). Study on the efficiency of different polymers used in polymer injection (flooding) operations in enhanced oil recovery of heavy oil reservoirs. *Basparesh*, 12(1), 14-24. DOI: [10.22063/basparesh.2021.2857.1545](https://doi.org/10.22063/basparesh.2021.2857.1545)
- [35] Shafiai, S. H., & Gohari, A. (2020). Conventional and electrical EOR review: the development trend of ultrasonic application in EOR. *Journal of Petroleum Exploration and Production Technology*, 10(7), 2923-2945. DOI: <https://doi.org/10.1007/s13202-020-00929-x>
- [36] Mohsin, M., & Meribout, M. (2015). An extended model for ultrasonic-based enhanced oil recovery with experimental validation. *Ultrasonics sonochemistry*, 23, 413-423. DOI: <https://doi.org/10.1016/j.ultsonch.2014.08.007>
- [37] Mohammadian, E., Junin, R., Rahmani, O., & Idris, A. K. (2013). Effects of sonication radiation on oil recovery by ultrasonic waves stimulated water-flooding. *Ultrasonics*, 53(2), 607-614. DOI: <https://doi.org/10.1016/j.ultras.2012.10.006>
- [38] Hamidi, H., Mohammadian, E., Rafati, R., Azdarpour, A., & Ing, J. (2015). The effect of ultrasonic waves on the phase behavior of a surfactant-brine-oil system. *Colloids and Surfaces A: Physicochemical and Engineering Aspects*, 482, 27-33. DOI:

<https://doi.org/10.1016/j.colsurfa.2015.04.009>

- [39] Hiedemann, E. A. (1954). Metallurgical effects of ultrasonic waves. *the Journal of the Acoustical Society of America*, 26(5), 831-842. DOI: <https://doi.org/10.1121/1.1907426>
- [40] Hamidi, H., Mohammadian, E., Junin, R., Rafati, R., Azdarpour, A., Junid, M., & Savory, R. M. (2014). The effect of ultrasonic waves on oil viscosity. *Petroleum Science and Technology*, 32(19), 2387-2395. DOI: <https://doi.org/10.1080/10916466.2013.831873>
- [41] Fox, F. E., Herzfeld, K. F., & Rock, G. D. (1946). The effect of ultrasonic waves on the conductivity of salt solutions. *Physical review*, 70(5-6), 329. <https://doi.org/10.1103/PhysRev.70.329>
- [42] Abo-Qudais, S. A. (2005). Effect of concrete mixing parameters on propagation of ultrasonic waves. *Construction and building materials*, 19(4), 257-263. DOI: <https://doi.org/10.1016/j.conbuildmat.2004.07.022>
- [43] Nazari, M., & Eteghadipour, M. (2017). Impacts of ultrasonic waves on seeds: a mini-review. *Agricultural Research & Technology: Open Access Journal*, 6(3), 1-6. ISSN: 2471-6774
- [44] Yu, D., Liu, B., & Wang, B. (2012). The effect of ultrasonic waves on the nucleation of pure water and degassed water. *Ultrasonics sonochemistry*, 19(3), 459-463. DOI: <https://doi.org/10.1016/j.ultsonch.2011.08.005>
- [45] Yasemi, S., Khalili, Y., Sanati, A., & Bagheri, M. (2023). Carbon capture and storage: Application in the oil and gas industry. *Sustainability*, 15(19), 14486. DOI: <https://doi.org/10.3390/su151914486>
- [46] Ahmadi, M., & Chen, Z. (2020). Challenges and future of chemical assisted heavy oil recovery processes. *Advances in colloid and interface science*, 275, 102081. DOI: <https://doi.org/10.1016/j.cis.2019.102081>
- [47] Malozyomov, B. V., Martyushev, N. V., Kukartsev, V. V., Tynchenko, V. S., Bukhtoyarov, V. V., Wu, X., ... & Kukartsev, V. A. (2023). Overview of methods for enhanced oil recovery from conventional and unconventional reservoirs. *Energies*, 16(13), 4907. DOI: <https://doi.org/10.3390/en16134907>
- [48] Abuhasel, K., Kchaou, M., Alquraish, M., Munusamy, Y., & Jeng, Y. T. (2021). Oily wastewater treatment: Overview of conventional and modern methods, challenges, and future opportunities. *Water*, 13(7), 980. DOI: <https://doi.org/10.3390/w13070980>
- [49] Pal, S., Mushtaq, M., Banat, F., & Al Sumaiti, A. M. (2018). Review of surfactant-assisted chemical enhanced oil recovery for carbonate reservoirs: challenges and future perspectives. *Petroleum Science*, 15, 77-102. DOI: <https://doi.org/10.1007/s12182-017-0198-6>
- [50] Mullakaev, M. S., Abramov, V. O., & Abramova, A. V. (2015). Development of ultrasonic equipment and technology for well stimulation and enhanced oil recovery. *Journal of petroleum science and engineering*, 125, 201-208. DOI: <https://doi.org/10.1016/j.petrol.2014.10.024>
- [51] Li, P., Ma, C., Chen, Z., Wang, H., Wang, Y., & Bai, H. (2023). A Review: Study on the Enhancement Mechanism of Heat and Moisture Transfer in Deformable Porous Media. *Processes*, 11(9), 2699. DOI: <https://doi.org/10.3390/pr11092699>
- [52] Khasi, S., Fayazi, A., & Kantzas, A. (2021). Effects of acoustic stimulation on fluid flow in porous media. *Energy & Fuels*, 35(21), 17580-17601. DOI: <https://doi.org/10.1021/acs.energyfuels.1c02631>
- [53] Khasi, S. (2023). Acoustically Assisted Displacements in Porous Media. DOI: <https://dx.doi.org/10.11575/PRISM/dspace/41275>
- [54] Dengae, A. V., Khelkhal, M. A., Getalov, A. A., Baimukhametov, G. F., Kayumov, A. A., Vakhin, A. V., & Gafurov, M. R. (2023). Innovations in Oil Processing: Chemical Transformation of Oil Components through Ultrasound Assistance. *Fluids*, 8(4), 108. DOI: <https://doi.org/10.3390/fluids8040108>

- [55] Rehman, M. M., & Meribout, M. (2012). Conventional versus electrical enhanced oil recovery: a review. *Journal of Petroleum Exploration and Production Technology*, 2, 169-179. DOI: <https://doi.org/10.1007/s13202-012-0035-9>
- [56] Hamida, T., & Babadagli, T. (2007). Analysis of capillary interaction and oil recovery under ultrasonic waves. *Transport in porous media*, 70, 231-255. DOI: <https://doi.org/10.1007/s11242-006-9097-9>
- [57] Wang, J., Lai, Y., Wang, X., & Ji, H. (2024). Advances in ultrasonic treatment of oily sludge: mechanisms, industrial applications, and integration with combined treatment technologies. *Environmental Science and Pollution Research*, 31(10), 14466-14483. DOI: <https://doi.org/10.1007/s11356-024-32089-4>
- [58] Wang, Z., & Gu, S. (2018). State-of-the-art on the development of ultrasonic equipment and key problems of ultrasonic oil production technique for EOR in China. *Renewable and Sustainable Energy Reviews*, 82, 2401-2407. DOI: <https://doi.org/10.1016/j.rser.2017.08.089>
- [59] Taheri-Shakib, J., Shekarifard, A., & Naderi, H. (2017). The experimental investigation of effect of microwave and ultrasonic waves on the key characteristics of heavy crude oil. *Journal of analytical and applied pyrolysis*, 128, 92-101. DOI: <https://doi.org/10.1016/j.jaap.2017.10.021>
- [60] Naderi, K., & Babadagli, T. (2008, October). Effect of ultrasonic intensity and frequency on oil/heavy-oil recovery from different wettability rocks. In *SPE International Thermal Operations and Heavy Oil Symposium* (pp. SPE-117324). SPE. DOI: <https://doi.org/10.2118/117324-MS>
- [61] Luo, X., Gong, H., He, Z., Zhang, P., & He, L. (2021). Recent advances in applications of power ultrasound for petroleum industry. *Ultrasonics Sonochemistry*, 70, 105337. DOI: <https://doi.org/10.1016/j.ultsonch.2020.105337>
- [62] Hamida, T., & Babadagli, T. (2005, October). Effects of ultrasonic waves on immiscible and miscible displacement in porous media. In *SPE Annual Technical Conference and Exhibition* (pp. SPE-95327). SPE. DOI: <https://doi.org/10.2118/95327-MS>
- [63] Amro, M. M., Al-Mobarky, M. A., & Al-Homadh, E. S. (2007, March). Improved oil recovery by application of ultrasound waves to waterflooding. In *SPE middle east oil and gas show and conference* (pp. SPE-105370). SPE. DOI: <https://doi.org/10.2118/105370-MS>
- [64] Arabzadeh, H., & Amani, M. (2017). Application of a novel ultrasonic technology to improve oil recovery with an environmental viewpoint. *J Pet Environ Biotechnol*, 8(02), 1-5. DOI: 10.4172/2157-7463.1000323
- [65] Wang, Z., Fang, R., & Guo, H. (2020). Advances in ultrasonic production units for enhanced oil recovery in China. *Ultrasonics sonochemistry*, 60, 104791. DOI: <https://doi.org/10.1016/j.ultsonch.2019.104791>
- [66] Naderi, K., & Babadagli, T. (2008). Clarifications on oil/heavy oil recovery under ultrasonic radiation through core and 2D visualization experiments. *Journal of Canadian Petroleum Technology*, 47(11). DOI: <https://doi.org/10.2118/08-11-56>
- [67] Wang, Z., & Xu, Y. (2015). Review on application of the recent new high-power ultrasonic transducers in enhanced oil recovery field in China. *Energy*, 89, 259-267. DOI: <https://doi.org/10.1016/j.energy.2015.07.077>
- [68] Abramov, V. O., Mullakaev, M. S., Abramova, A. V., Esipov, I. B., & Mason, T. J. (2013). Ultrasonic technology for enhanced oil recovery from failing oil wells and the equipment for its implementation. *Ultrasonics sonochemistry*, 20(5), 1289-1295. DOI: <https://doi.org/10.1016/j.ultsonch.2013.03.004>
- [69] Mohammadian, E., Shirazi, M. A., & Idris, A. K. (2011, September). Enhancing oil recovery through application of ultrasonic assisted waterflooding. In *SPE Asia Pacific Oil and Gas Conference and Exhibition* (pp. SPE-145014). SPE. DOI: <https://doi.org/10.2118/145014-MS>

- [70] Juliano, P., Swiergon, P., Mawson, R., Knoerzer, K., & Augustin, M. A. (2013). Application of ultrasound for oil separation and recovery of palm oil. *Journal of the American Oil Chemists' Society*, 90(4), 579-588. DOI: <https://doi.org/10.1007/s11746-012-2191-y>
- [71] Zhang, H., Gao, C., Zhang, H., Song, N., & Cao, Q. (2024). Revisiting the Application of Ultrasonic Technology for Enhanced Oil Recovery: Mechanisms and Recent Advancements. *Energies*, 17(14), 3517. DOI: <https://doi.org/10.3390/en17143517>
- [72] Hamida, T., & Babadagli, T. (2005, April). Effect of ultrasonic waves on the capillary-imbibition recovery of oil. In *SPE Asia Pacific Oil and Gas Conference and Exhibition* (pp. SPE-92124). SPE. DOI: <https://doi.org/10.2118/92124-MS>
- [73] Gao, Y., Ding, R., Wu, S., Wu, Y., Zhang, Y., & Yang, M. (2015). Influence of ultrasonic waves on the removal of different oil components from oily sludge. *Environmental technology*, 36(14), 1771-1775. DOI: <https://doi.org/10.1080/09593330.2015.1010594>
- [74] Wang, Z., Xu, Y., & Gu, Y. (2015). Lithium niobate ultrasonic transducer design for enhanced oil recovery. *Ultrasonics Sonochemistry*, 27, 171-177. DOI: <https://doi.org/10.1016/j.ultsonch.2015.05.017>
- [75] Khalili, Y., & Ahmadi, M. (2023). Reservoir modeling & simulation: Advancements, challenges, and future perspectives. *Journal of Chemical and Petroleum Engineering*, 57(2), 343-364. DOI: [10.22059/jchpe.2023.363392.1447](https://doi.org/10.22059/jchpe.2023.363392.1447)
- [76] Elwegaa, K., Emadi, H., Soliman, M., Gamadi, T., & Elsharafi, M. (2019). Improving oil recovery from shale oil reservoirs using cyclic cold carbon dioxide injection—An experimental study. *Fuel*, 254, 115586. DOI: <https://doi.org/10.1016/j.fuel.2019.05.169>
- [77] Huang, X., Zhou, C., Suo, Q., Zhang, L., & Wang, S. (2018). Experimental study on viscosity reduction for residual oil by ultrasonic. *Ultrasonics Sonochemistry*, 41, 661-669. DOI: <https://doi.org/10.1016/j.ultsonch.2017.09.021>
- [78] Saravanan, A., Kumar, P. S., Vardhan, K. H., Jeevanantham, S., Karishma, S. B., Yaashikaa, P. R., & Vellaichamy, P. (2020). A review on systematic approach for microbial enhanced oil recovery technologies: Opportunities and challenges. *Journal of Cleaner Production*, 258, 120777. DOI: <https://doi.org/10.1016/j.jclepro.2020.120777>
- [79] Mullakaev, M. S., Abramov, V. O., & Abramova, A. V. (2017). Ultrasonic piezoceramic module and technology for stimulating low-productivity wells. *Journal of Petroleum Science and Engineering*, 158, 529-534. DOI: <https://doi.org/10.1016/j.petrol.2017.08.067>
- [80] Samanta, A. S., & Arora, R. (2018). Structural analysis of horn used in ultrasonic enhanced oil recovery. *Indian Journal of Science and Technology*, 11(28), 1-10. DOI: 10.17485/ijst/2018/v11i28/130781, July 2018
- [81] Mullakaev, M. S., Saltykov, Y. A., Saltykov, A. A., & Mullakaev, R. M. (2023, October). Experience of Ultrasonic Technology Application in the Samotlor Field Wells (Western Siberia). In *Conference on Physical and Mathematical Modeling of Earth and Environment Processes* (pp. 191-196). Cham: Springer Nature Switzerland. DOI: https://doi.org/10.1007/978-3-031-54589-4_20
- [82] Skadsem, H. J., Gardner, D., Jiménez, K. B., Govil, A., Palacio, G. O., & Delabroy, L. (2021). Study of ultrasonic logs and seepage potential on sandwich sections retrieved from a north sea production well. *SPE Drilling & Completion*, 36(04), 976-990. DOI: <https://doi.org/10.2118/206727-PA>
- [83] Adenutsi, C. D., Turkson, J. N., Wang, L., Zhao, G., Zhang, T., Quaye, J. A., ... & Sokama-Neuyam, Y. A. (2023). Review on Potential Application of Saponin-Based Natural Surfactants for Green Chemical Enhanced Oil Recovery: Perspectives and Progresses. *Energy & Fuels*, 37(13), 8781-8823. DOI: <https://doi.org/10.1021/acs.energyfuels.3c00627>

- [84] Kamkar, A., Hosseini, H., Norouzi-Apourvari, S., & Schaffie, M. (2021). Insight into the Synergic Effect of Ultrasonic Waves, SDS Surfactant, and Silica Nanoparticles on Wettability Alteration of Carbonate Rocks. *Arabian Journal for Science and Engineering*, 1-14. DOI: <https://doi.org/10.1007/s13369-021-06356-2>
- [85] Jeong, C., Kallivokas, L. F., Huh, C., & Lake, L. W. (2011, October). Maximization of oil mobility within a hydrocarbon reservoir for elastic wave-based enhanced oil recovery. In *SPE Annual Technical Conference and Exhibition?* (pp. SPE-147150). SPE. DOI: <https://doi.org/10.2118/147150-MS>
- [86] Deng, X., Tariq, Z., Murtaza, M., Patil, S., Mahmoud, M., & Kamal, M. S. (2021). Relative contribution of wettability Alteration and interfacial tension reduction in EOR: A critical review. *Journal of Molecular Liquids*, 325, 115175. DOI: <https://doi.org/10.1016/j.molliq.2020.115175>
- [87] Zhao, L., Yuan, H., Yang, J., Han, D. H., Geng, J., Zhou, R., ... & Yao, Q. (2017). Mobility effect on poroelastic seismic signatures in partially saturated rocks with applications in time-lapse monitoring of a heavy oil reservoir. *Journal of Geophysical Research: Solid Earth*, 122(11), 8872-8891. DOI: <https://doi.org/10.1002/2017JB014303>
- [88] Jiang, C., Yang, W., Duan, M., Wang, G., & Xu, Z. (2022). Pore structure alteration and permeability enhancement of shale under cyclic thermal impacts. *Powder Technology*, 396, 385-393. DOI: <https://doi.org/10.1016/j.powtec.2021.11.010>
- [89] Shen, L., Pang, S., Zhong, M., Sun, Y., Qayum, A., Liu, Y., ... & Ren, X. (2023). A comprehensive review of ultrasonic assisted extraction (UAE) for bioactive components: Principles, advantages, equipment, and combined technologies. *Ultrasonics Sonochemistry*, 106646. DOI: <https://doi.org/10.1016/j.ultsonch.2023.106646>
- [90] Abdulkareem, F. A., & Padmanabhan, E. (2021). Applied techniques for residual oil recovery from source rocks: A review of current challenges and possible developments. *The Canadian Journal of Chemical Engineering*, 99(1), 251-267. DOI: <https://doi.org/10.1002/cjce.23838>
- [91] Fallah Kelarijani, A., Gholipour Zanjani, N., & Kamran Pirzaman, A. (2020). Ultrasonic assisted transesterification of rapeseed oil to biodiesel using nano magnetic catalysts. *Waste and biomass valorization*, 11(6), 2613-2621. DOI: <https://doi.org/10.1007/s12649-019-00593-1>
- [92] Kumar T, A., Pareek, S., Kaur, R., Sagar, N. A., Singh, L., Sami, R., ... & Rahman, M. M. (2022). Optimization of ultrasonic-assisted enzymatic extraction of freeze-dried sea buckthorn (*Hippophae rhamnoides* L.) berry oil using response surface methodology. *Sustainability*, 14(17), 10849. DOI: <https://doi.org/10.3390/su141710849>
- [93] Adeyemi, I., Meribout, M., & Khezzar, L. (2022). Recent developments, challenges, and prospects of ultrasound-assisted oil technologies. *Ultrasonics Sonochemistry*, 82, 105902. DOI: <https://doi.org/10.1016/j.ultsonch.2021.105902>
- [94] Struhs, E., Hansen, S., Mirkouei, A., Ramirez-Corredores, M. M., Sharma, K., Spiers, R., & Kalivas, J. H. (2021). Ultrasonic-assisted catalytic transfer hydrogenation for upgrading pyrolysis-oil. *Ultrasonics Sonochemistry*, 73, 105502. DOI: <https://doi.org/10.1016/j.ultsonch.2021.105502>
- [95] Wang, A., Chen, C., Liu, C., Ma, J., Lin, T., Ding, M., & Xu, H. (2024). Critical review on advances and perspectives of ultrasound assisted membrane technologies for water purification. *Chemical Engineering Journal*, 148873. DOI: <https://doi.org/10.1016/j.cej.2024.148873>
- [96] Khan, M. I., Shixing, W., Ullah, E., Sajjad, M., Zhang, L., & Fu, L. (2024). Enhanced metal recovery using ultrasound assisted leaching (UAL). An overview. *Journal of Molecular Liquids*, 125545. DOI: <https://doi.org/10.3390/molecules29091984>
- [97] Li, X., Zheng, L., Li, G., Pu, J., Zhang, T., & Huang, F. (2024). Enhanced oil recovery in tight reservoirs by ultrasonic-assisted CO₂ flooding: Experimental study and molecular dynamics simulation. *Fuel*, 378, 132889. DOI: <https://doi.org/10.1016/j.fuel.2024.132889>

- [98] Alhalafı, M. H., Rizk, S. A., Al-Malki, E. S., & Algohary, A. M. (2024). Microwave-ultrasonic assisted extraction of lignin to synthesize new nano micellar organometallic surfactants for refining oily wastewater. *Bioresources and Bioprocessing*, 11(1), 46. DOI: <https://doi.org/10.1186/s40643-024-00761-9>
- [99] Yu, R., Fu, G., Li, X., Xi, X., Chen, X., Chen, L., ... & Zhu, X. (2024). Ultrasonic-assisted preparation of SBS modified asphalt: Cavitation bubble numerical simulation and rheological properties. *Ultrasonics Sonochemistry*, 108, 106982. DOI: <https://doi.org/10.1016/j.ultsonch.2024.106982>
- [100] Drannikov, A. A., Trusova, M. E., & Di Martino, A. (2024). Reviewing twenty years of patents on ultrasonic-assisted pectin extraction from food and food waste. *Chimica Techno Acta*. 2024. Vol. 11. № 2, 11(2). DOI: [10.15826/chimtech.2024.11.2.13](https://doi.org/10.15826/chimtech.2024.11.2.13)
- [101] Suttiarporn, P., Seangwattana, T., Srisurat, T., Kongitthinon, K., Chumnavej, N., & Luangkamin, S. (2024). Enhanced extraction of clove essential oil by ultrasound and microwave assisted hydrodistillation and their comparison in antioxidant activity. *Current Research in Green and Sustainable Chemistry*, 8, 100411. DOI: <https://doi.org/10.1016/j.crgsc.2024.100411>
- [102] Erturun, Ö. F., Tekaut, H., Çiçek, A., Uçak, N., Namlu, R. H., Lotfi, B., & Kılıç, S. E. (2024). An experimental study on ultrasonic-assisted drilling of Inconel 718 under different cooling/lubrication conditions. *The International Journal of Advanced Manufacturing Technology*, 130(1), 665-682. DOI: <https://doi.org/10.1007/s00170-023-12735-w>
- [103] Shao, J., Ding, D., Zhu, Z., & Chen, X. (2024). Ultrasound-assisted extraction of sumac fruit oil and analysis of its fatty acid composition. *Journal of Food Science*. DOI: <https://doi.org/10.1111/1750-3841.17452>
- [104] Joco, R. A., Lavarias, J. A., Peneyra, R. G., & Somera, C. G. (2024). Recent Development on the Extraction Process of Plants Essential Oil and its Effect on Chemical Composition: A Review. *Advanced Journal of Graduate Research*, 14(1), 9-20. DOI: <https://doi.org/10.21467/ajgr.14.1.9-20>
- [105] Mierez, J., AlTammar, M. J., & Alruwaili, K. M. (2023, June). Review of Recent Research Related to Ultrasonic Technologies for Well Productivity Enhancement. In *ARMA US Rock Mechanics/Geomechanics Symposium* (pp. ARMA-2023). ARMA. DOI: <https://doi.org/10.56952/ARMA-2023-0477>